


OFFICE LIGHTING

OSSEO LED

Product Description

Particularly well suited for indoor use. Suitable as the primary light source dedicated for office work requiring eyesight concentration or work with computers. Luminaire designed to create continuous-row system with option for through-wiring. May also be used in representative rooms. Unique design, energy saving LED GO! light sources and compatibility with external lighting control systems in the DALI standard make this fitting a good solution for use in modern A-class office buildings.

Product Image

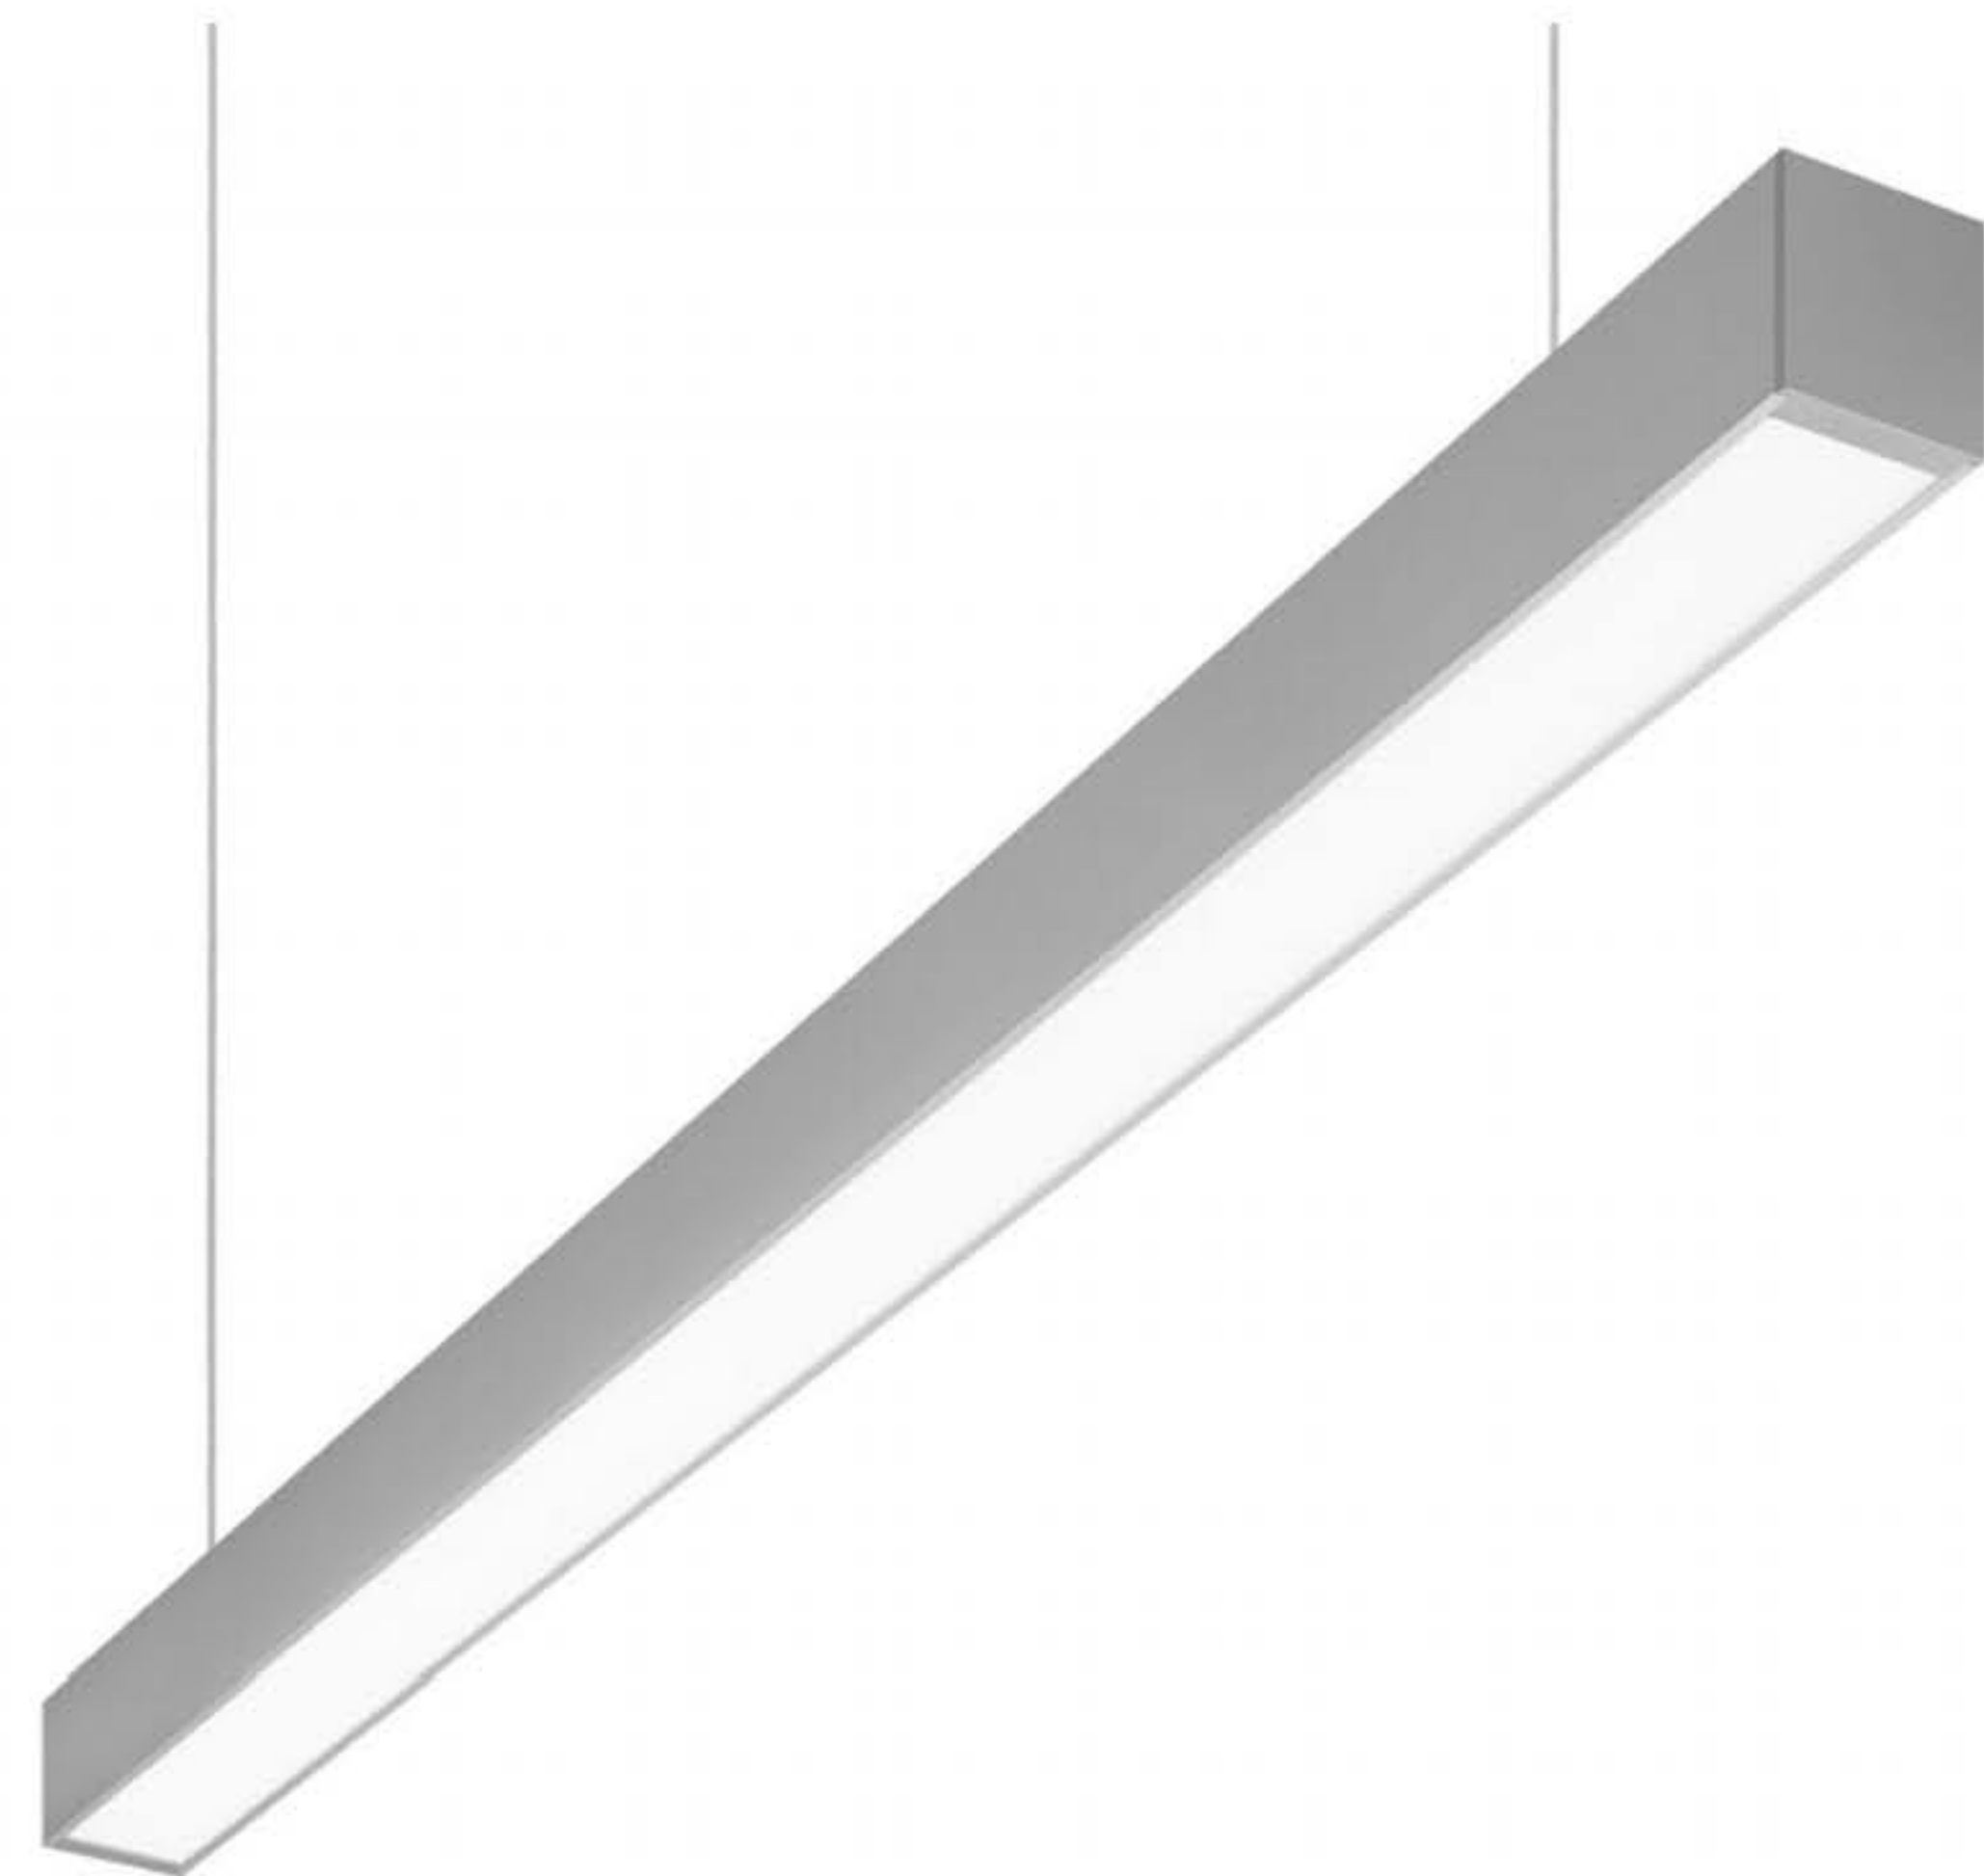

Product Spec

Supply voltage:	220V-240V	Material of the body:	Aluminium
Frequency:	50-60Hz	Colour temperature:	3000K, 4000K
Ingress protection IP:	IP20	Colour of the body:	Grey
Rated power:	20w, 40w, 60w	Mounting version:	Surface / suspended
Electrical protection class:	I	Material of the diffuser:	PMMA
Impact resistance IK:	IK06	Type of the diffuser:	Opal / PRM
Colour rendering:	Ra>80		

Dimensions

Size	75/55/1420mm
-------------	--------------

Compliance & Approvals:



Models

Title	Rated power	Colour temperature	Luminous flux **	Material of the diffuser	Type of the diffuser	Energy efficiency class	Mounting version
OSSEO 20W	20	3000K	2250lm	PMMA	PRM	A+	Surface/Suspended
OSSEO 20W	20	4000K	2450lm	PMMA	PRM	A+	Surface/Suspended
OSSEO 40W	40	3000K	4000lm	PMMA	PRM	A+	Surface/Suspended
OSSEO 40W	40	4000K	4350lm	PMMA	PRM	A+	Surface/Suspended
OSSEO 60W	60	3000K	5350lm	PMMA	PRM	A+	Surface/Suspended
OSSEO 60W	60	4000K	5500lm	PMMA	PRM	A+	Surface/Suspended